


MR MAXI30i AIR HANDLER

DATASHEET

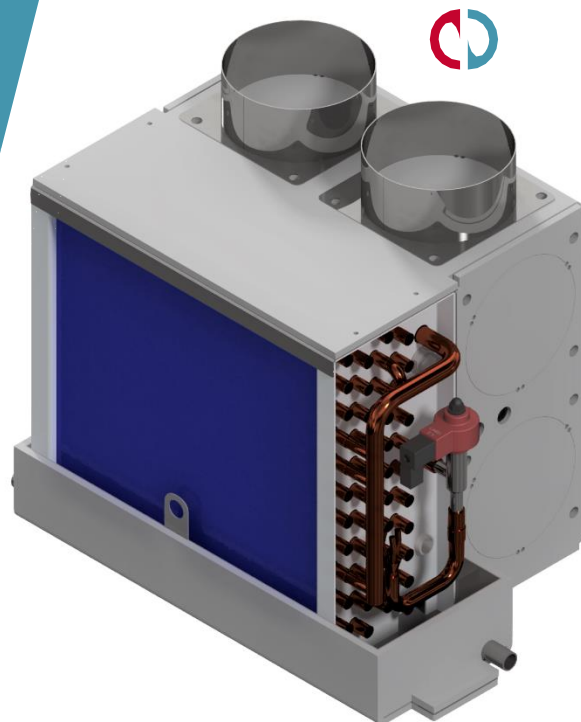



CAPACITY

Air flow m ³ / h	100	750	1200
Cooling Kw	1,0	5,0	8,0
Heating Kw	1,0	5,0	8,0

Total BTU Capacity:	30000 BTU/h
Static pressure:	800 Pa
Power supply:	230 Vac 50/60 Hz
Power consumption:	100 W (typical) – 170 W (max)
Control:	Data bus rs485 Modbus RTU
Size W x D x H:	444 x 286 x 362 mm
Weight:	10 Kg
Frame:	Stainless steel 316
Air working range:	-20°C to +50°C
Noise:	10 dB (night mode) - 65 dB max
Vibration:	No significant vibration
Air duct size mm:	4 x 125
Refrigerant pipe:	1/2" Gas 3/8" Liquid


MR MAXI30i

FAN PERFORMANCE

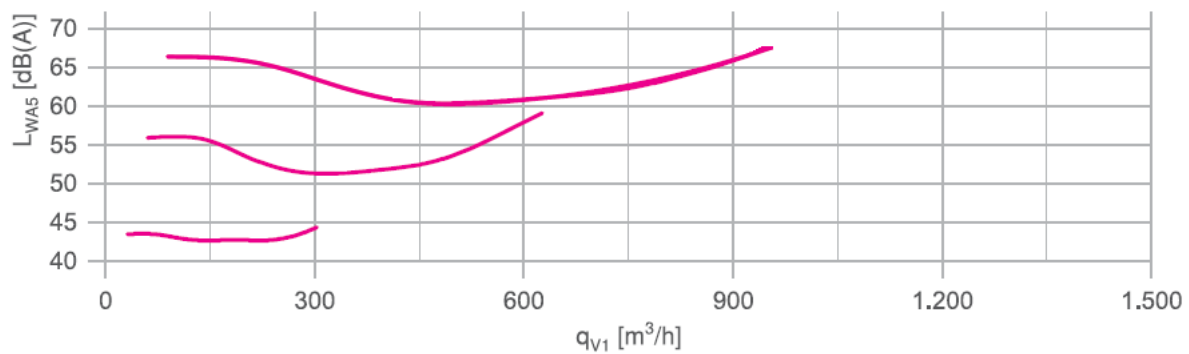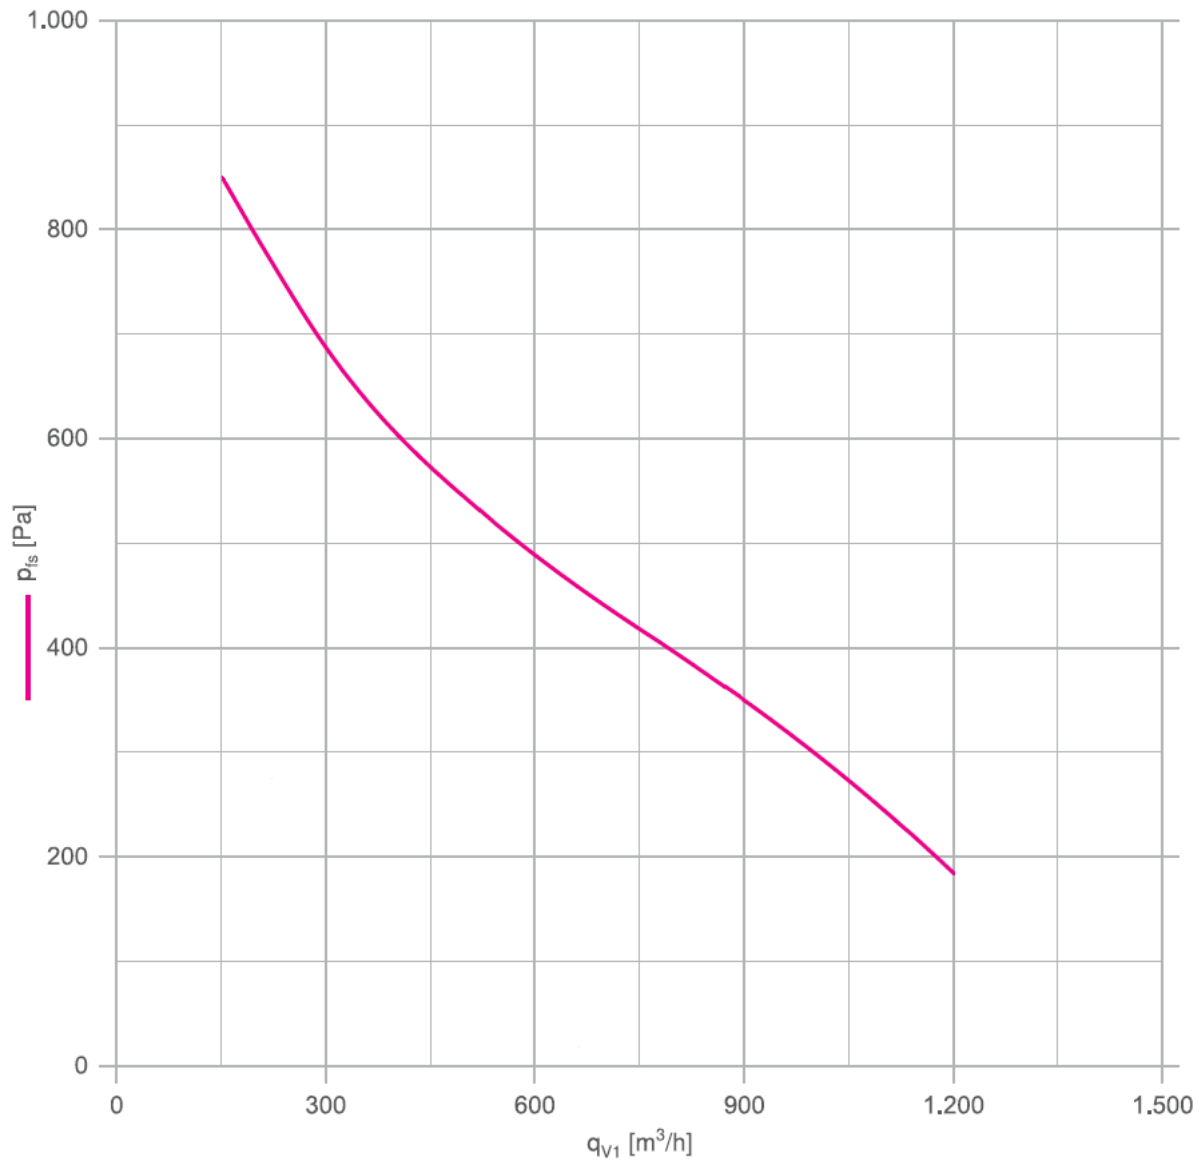

MR MAXI30i

ELECTRICAL CONNECTIONS

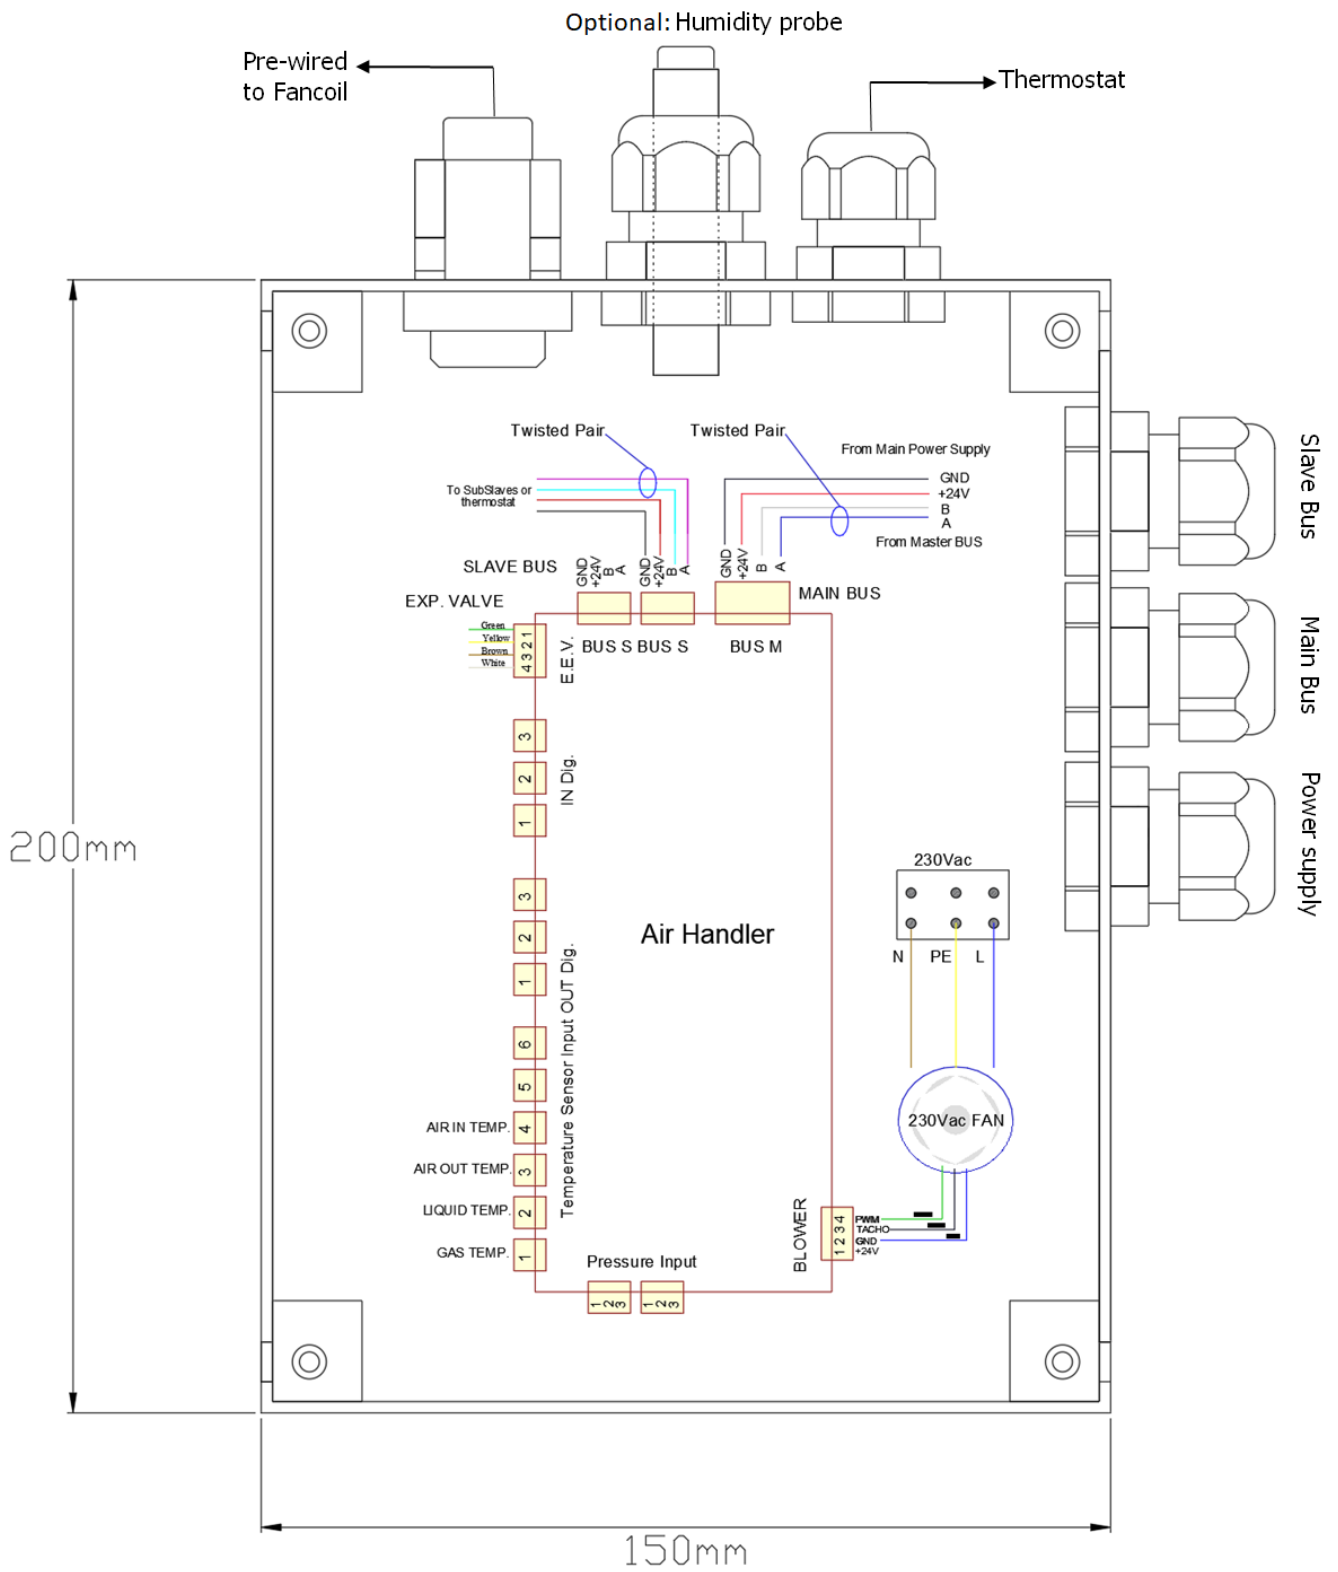

200mm

150mm

MR MAXI30i

OVERALL DIMENSIONS

